


Tire Gard Installation Instructions

1. Check interior of tire to make sure there is no foreign matter.
2. Align Tire Gard as close to *center* of tread as possible.
3. Press liner into place. A rubber hump will appear and product may seem too large for tire. Press on hump, liner should snap into place. May have to work liner around tire with your hands while putting pressure on the hump. (It must snap into place, do not leave hump.) It is necessary to put a light coat of lubricant such as Murphy's tire lube or tire talc on liner facing the interior of tire.
4. A new tube should be used whenever Tire Gards are installed. Normally, the same size tube can be used as recommended for tire. Put tube in and air up with low pressure. If wrinkles appear on inner side of tube you may have to use the next size down tube.
5. If you should have any problems or questions, please call 419-339-9386.

****In the event that the Tire Gard does not fit properly (while tire is dismounted) please measure *inside diameter (top to bottom)*.**

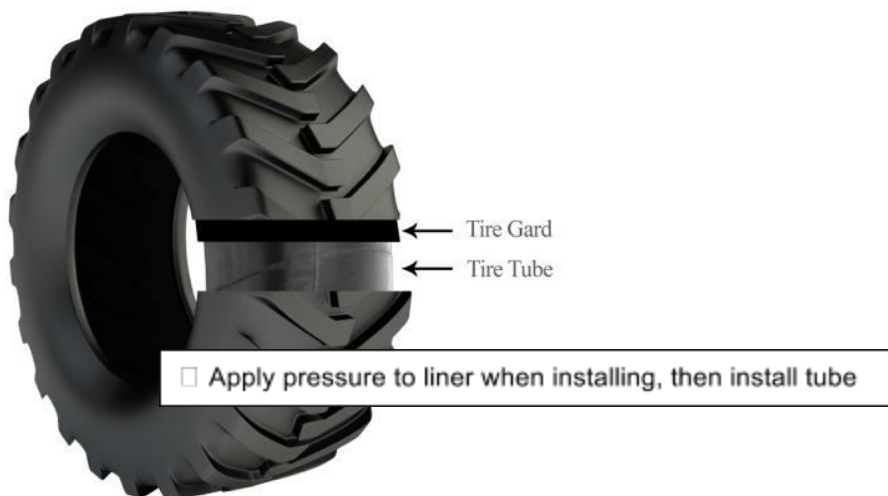

Do not leave hump in liner and install on rim. Liner must be flat against interior of tire all the way around.